



### *Cabinet Hardmount Features*

- The secret to our strength stems from Cissell's steel frame construction, which limits the number of welded parts and provides superior stability.
- Our bearing housing is mounted directly to the frame — increasing stability and minimizing vibration.
- An extra-large stainless steel door, with a rugged hinge and handle, stands up to the repeated use of a heavy-volume laundry.
- A dependable door interlock ensures the machine only operates after the door is closed and locked. The secure design represents outstanding strength, reliability and safety.
- Steel cabinet, washtub and cylinder make keeping the washer clean easy and contribute to its long-lasting construction.

### **EXCEPTIONAL CHOICES**

For more than half a century, Cissell has been an industry leader in the design and innovation of laundry equipment. Our unwavering commitment to building durable, reliable and affordable equipment has resulted in *Exceptional Choices* for our customers. No other brand can provide you with as broad a product range combined with outstanding quality, reliability, technical support and dependable distributors.

Cissell's hardmount washer-extractors are recognized worldwide for producing superior results and maximum productivity. When you put Cissell in your laundry, you are choosing products that will stand up to the toughest demands. When you select one of our hardmount models, you'll receive top quality results with every cycle. Our high-performance laundry equipment is built to give you complete control to tailor each wash to the specific requirements of the individual load. In addition, the large capacity range of our washers ensures there's a size to meet your unique needs. *Exceptional Choices* — it's what makes Cissell the best overall value for your laundry.

### *Washer-Extractor Features*

- Ultra-high speed extraction of up to 165 G-Force reduces drying time and helps laundries increase throughput.
- An inverter drive enables the machine to gradually ramp up to its high extraction speeds easing wear and tear on components.




## EXCEPTIONAL CONTROL

Cissell's hardmount washer-extractors are equipped with versatile microprocessor controls. These controls can help you realize greater energy savings through their efficient designs.

### Micro 20 Control Features

- Nine factory programmed cycles.
- Capable of handling up to 99 total programmable cycles, to give laundry managers exceptional flexibility should their requirements change.

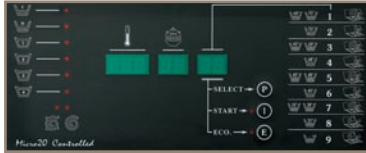

### PS40 Control Features

- Ten factory preprogrammed cycles.
- 40 additional programmable cycles, which give managers greater control of the wash process through setting wash cycles, spin speeds and water levels.
- An infrared connection makes it easy to upload wash programs from a PC.



## EXCEPTIONAL VALUE

For more peace of mind, all Cissell washer-extractors come with an exceptional three-year warranty. We will cover any non-perishable part that fails due to defect in material or workmanship for three years from the date of installation. No one else gives you so many advantages with so much affordability.



## Specifications

	CWF018	CWF025	CWF035	CWF055	CWF075	CWF090
Capacity - lb (kg)	18 (8.2)	25 (11.3)	35 (15.9)	55 (24.9)	75 (34.0)	90 (43.9)
Wash Speed - RPM	50	50	50	50	50	50
High Extract Speed - RPM	525	525	475	2-spnd 445	M-spnd 628	415
Maximum G-Force	82	82	82	82	165	82
Cylinder Diameter - in (mm)	20 7/8" (530)	20 7/8" (530)	25 9/16" (650)	29 1/2" (750)	33 7/16" (850)	33 7/16" (850)
Cylinder Depth - in (mm)	13" (330)	17 5/16" (440)	19 11/16" (500)	20 7/8" (530)	21 1/8" (537)	27 7/8" (707)
Cylinder Volume - ft <sup>3</sup> (liters)	2.58 (73)	3.35 (95)	5.83 (165)	8.26 (234)	10.74 (304)	14.13 (400)
Drain Outlet Size - in (mm)	2" (50)	2" (50)	2" (50)	3" (75)	3" (75)	3" (75)
Water Inlet - Connection Size	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT
Number of Inlets	3	3	3	3	3	3
Circuit Breaker - 200-240v/50-60/1-3ph 200-240v/50-60/3ph 380-415v/50-60/3ph 440-480v/50-60/3ph	15 15 15 15	15 15 15 15	15 15 15 15	15 15 15 15	15 15 15 15	15 15 15 15
Depth - in (mm)	26 3/8" (670)	30 5/16" (770)	33 7/8" (860)	36 1/2" (927)	41 9/16" (1055)	53 5/8" (1360)
Width - in (mm)	26" (660)	26" (660)	30 11/16" (780)	33 7/8" (860)	39" (990)	39" (990)
Height - in (mm)	39 15/16" (1041)	39 15/16" (1041)	46 1/4" (1175)	53 3/16" (1351)	54 9/16" (1386)	55 9/16" (1412)
Door Opening Diameter - in (mm)	11 13/16" (300)	11 13/16" (300)	11 13/16" (300)	15 3/4" (400)	15 3/4" (400)	15 3/4" (400)
Net Weight - lb (kg)	399 (181)	441 (200)	657 (298)	844 (383)	1177 (534)	1235 (560)
Shipping Weight - lb (kg)	432 (196)	461 (209)	723 (328)	955 (433)	1287 (584)	1334 (605)
Agency Approvals	CE, cETL <sub>US</sub>	CE, cETL <sub>US</sub>	CE, cETL <sub>US</sub>	CE, cETL <sub>US</sub>	CE, cETL <sub>US</sub>	CE, cETL <sub>US</sub>

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2000.

Printed in the U.S.A.

P.O. Box 990 • Ripon, WI • 54971-0990  
888-223-2980

[www.cissell.com](http://www.cissell.com)